

## Product Data Sheet

# GlassGuard® IP65 T5 LED Diffused Luminaire with replaceable light source



Wattage: 50/52/74w

### Product features

- High output T5 LED diffused luminaire fitted with GlassGuard Blackband® replaceable light source
- Ultra long-life T5 LED tubes
- High-quality Philips or Osram LED Tubes
- Wide operating temperature range: -25°C up to +40°C (brand dependent)
- Polycarbonate construction with high-quality stainless steel fasteners
- Silicone gasket for IP65 compliance
- Robust and impact-resistant luminaire body (IK08)
- Simple installation - practical and easy to maintain with optimal mounting height: up to 5m

### Product benefits

- Up to 60% energy savings over conventional lighting technology
- Up to 60,000 hours service life
- 5 year parts warranty
- T5 LED Lamps manufactured to Industry compliant protection – BlackBand® to IEC 61549
- Significantly reduces the risk of glass and plastic contamination and shedding of foreign body
- Easy installation and low 'fix and forget' maintenance
- ECA eligible (Enhanced Capital Allowance – UK)

### Areas of application


- Internal & external use
- Cold rooms, supply rooms, logistics facilities, warehouses, corridors and production halls

## GlassGuard® IP65 T5 LED Diffused Luminaire with replaceable light source



### Dimensions

Type	A	B	C
All models	1570mm	100mm	90mm

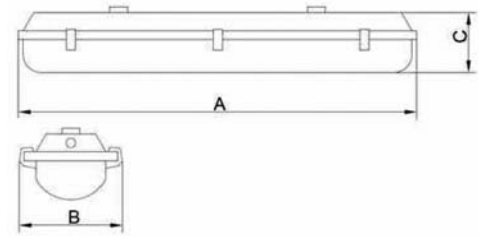

Note: Wattage, lumen outputs and operating temperatures vary with brand. Please contact your local Lighting Advisor for advice on the right product for your environment.

### Mounting, maintenance and general operation

- Supplied with mounting brackets and gaskets
- Tool-free safe lamp change and installation
- Upon request: emergency light mode
- Compliance with SELV (safety extra low voltage)
- Luminaire suitable for through-connection



*Easy lamp replacement*

